
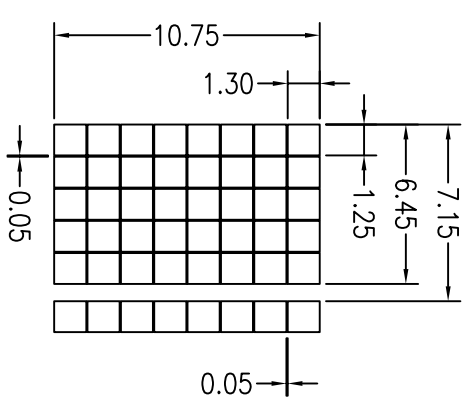
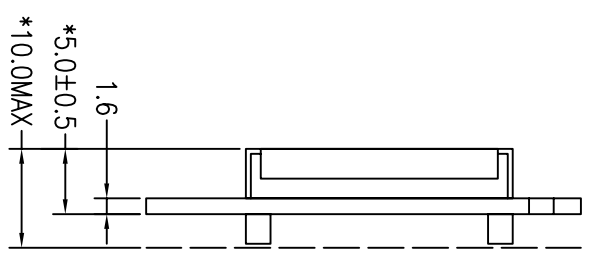


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	AUG-20-2007
B	Change TK Design	MAR-24-2008

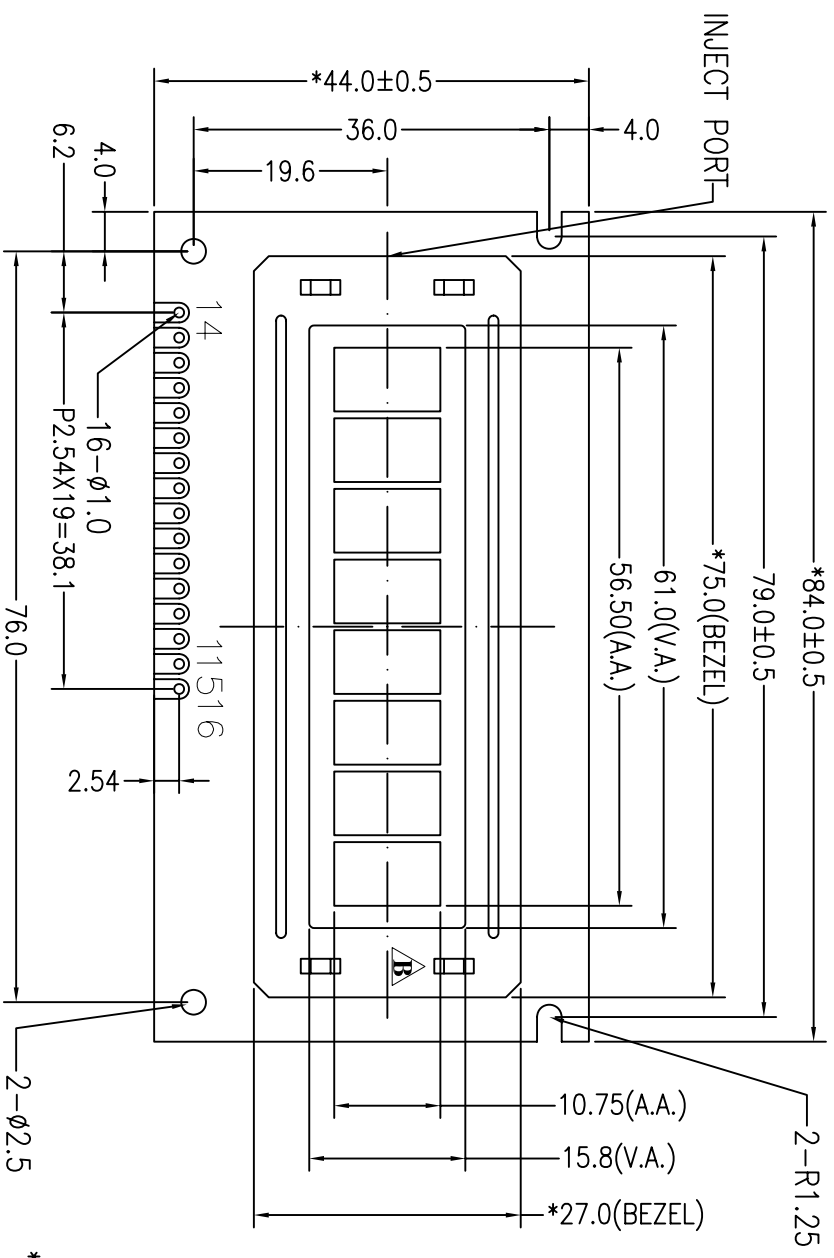

DOT SIZE  
SCALE 2.5:1

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDK	LEDA

Specification:

- 1). Driving: Duty:1/8, Bias:1/4, VLCD:4.8V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Yellow-Green/Positive/Reflective
- 4). Operating temp.: 0°C~+50°C  
Storage temp.: -10°C~+60°C
- 5). IC:SPLC780D-001B-C (Or Compatible)
- 6). Dimensions with mark "\*" are important,with mark "()" are referenced
- 7). All the raw materials are RoHS compliant

**深圳秋田电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

SCALE: FIT 适应图面  
比例

SHEET: 1 OF 1  
页次

GENERAL TOL: ±0.3  
公差

UNIT: mm  
单位

DATE: \_\_\_\_\_  
日期

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	APPROVALS 签字	DATE
FAV-ABC008001B01-R-00			ABC008001B01-1A-NR	CHK:	
				DWN:	

DO NOT SCALE THIS DRAWING.