


Stellaris® LM4F Series MCUs

General MCU LM4F110 Series	General MCU + USB Device LM4F120 Series	General MCU + USB OTG LM4F130 Series	Motion Control + USB OTG LM4F230 Series	Package
LM4F110	LM4F120	LM4F130	LM4F230	64-pin LQFP
LM4F111	LM4F121	LM4F131	LM4F231	64-pin LQFP
LM4F112	LM4F122	LM4F132	LM4F232	100-pin LQFP 144-pin LQFP

Product Features

- ARM® Cortex™-M4F Processor Core
 - 80-MHz operation; 100 DMIPS performance
 - ARM Cortex SysTick Timer
 - Nested Vectored Interrupt Controller (NVIC)
 - Wake-Up Interrupt Controller (WIC) with clock gating
 - Embedded Trace Macro (ETM) and Trace Port
 - IEEE754-compliant single-precision Floating-Point Unit (FPU)
- On-Chip Memory
 - Up to 256 KB single-cycle Flash memory up to 40 MHz
 - Up to 32 KB single-cycle SRAM
 - 2 KB EEPROM
 - Internal ROM loaded with StellarisWare® software including Stellaris® Peripheral Driver Library, Stellaris® Boot Loader, Advanced Encryption Standard (AES) cryptography tables, Cyclic Redundancy Check (CRC) error detection functionality
- Advanced Serial Integration
 - Two CAN 2.0 A/B controllers
 - USB 2.0 OTG/Host/Device
 - Eight UARTs with IrDA, 9-bit and ISO-7816 support (one UART with modem flow control and status)
 - Six I²C modules
 - Four Synchronous Serial Interface modules (SSI)
- Analog
 - Two 12-bit Analog-to-Digital Converters (ADC) with 24 analog input channels and sample rate of 1M s/s
 - Three analog comparators
 - 16 digital comparators
 - On-chip voltage regulator
- System Integration
 - Direct Memory Access Controller (DMA)
 - System control and clocks including on-chip precision 16-MHz oscillator
 - Six 32-bit timers (up to twelve 16-bit)
 - Six wide 64-bit timers (up to twelve 32-bit)
 - Twelve 16/32-bit Capture Compare PWM (CCP) pins
 - Twelve 32/64-bit Capture Compare PWM (CCP) pins
 - Lower-power battery-backed Hibernation module
 - Real-Time Clock in Hibernation module
 - Two Watchdog Timers
 - Up to 49 GPIOs in a 64-pin package, up to 69 GPIOs in a 100-pin package, up to 105 GPIOs in a 144-pin package, depending on configuration
- Advanced Motion Control
 - Two PWM modules, with a total of 16 advanced PWM outputs for motion and energy applications
 - Eight fault inputs to promote low-latency shutdown
 - Two Quadrature Encoder Inputs (QEI)
- JTAG and ARM Serial Wire Debug (SWD)
- 64-, 100-, and 144-pin LQFP package
- Industrial (-40°C to 85°C) temperature range

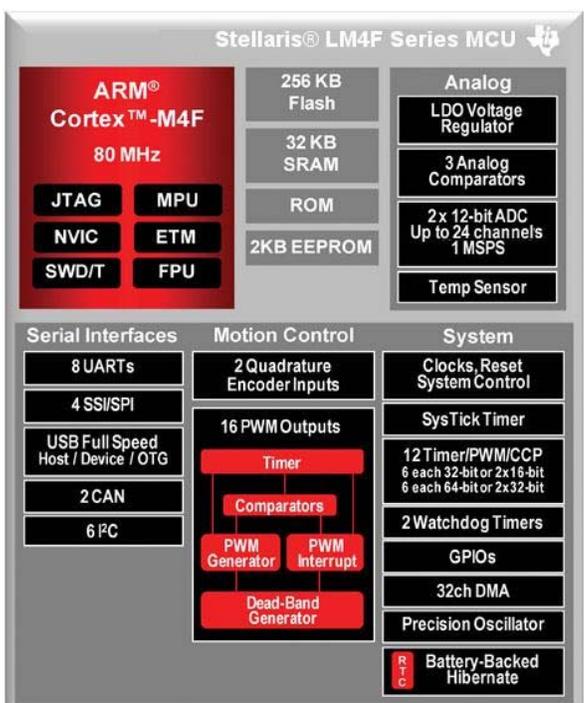

LM4F Series Block Diagram. This block diagram shows the superset of features for the LM4F series of Stellaris® microcontrollers.

Target Applications

The LM4F series microcontrollers are targeted for industrial applications, including:

- factory automation
- power and energy
- fire and security
- HVAC and building control
- medical instrumentation
- motion control
- gaming equipment
- transportation
- test/measurement equipment

Evaluation Kit

The Stellaris® EK-LM4F232 Evaluation Kit provides a low-cost and effective means of evaluating Stellaris microcontrollers before purchase. See the website at www.ti.com/stellaris for the latest tools available or ask your distributor.

Product Number	Description
EKK-LM4F232	Stellaris® LM4F232 Evaluation Kit for Keil™ RealView® MDK-ARM (32 KB code-size limited)
EKI-LM4F232	Stellaris® LM4F232 Evaluation Kit for IAR Systems Embedded Workbench® (32 KB code-size limited)
EKC-LM4F232	Stellaris® LM4F232 Evaluation Kit for Sourcery CodeBench (30-day limited)
EKT-LM4F232	Stellaris® LM4F232 Evaluation Kit for Code Red Technologies Red Suite (90-day limited)
EKS-LM4F232	Stellaris® LM4F232 Evaluation Kit for Code Composer Studio™ IDE (board-locked)



Stellaris® LM4F Series MCUs (continued)

TEXAS INSTRUMENTS



Stellaris® LM4F110 Series — General MCU

Series	Flash (KB)	SRAM (KB)	5-V Tolerant GPIOs	Package	Information
LM4F110B2QR	32	12	43	64-pin LQFP	Includes low-power hibernate functionality.
LM4F110C4QR	64	24			
LM4F110E5QR	128	32			
LM4F110H5QR	256	32			
LM4F111B2QR	32	12	49	64-pin LQFP	No low-power hibernate functionality, but includes additional serial functionality, and up to six more I/Os than the LM4F110 Series.
LM4F111C4QR	64	24			
LM4F111E5QR	128	32			
LM4F111H5QR	256	32			
LM4F112C4QC	64	24	69	100-pin LQFP	Includes low-power hibernate functionality, and additional serial and analog functionality in larger pin-count packages.
LM4F112E5QC	128	32			
LM4F112H5QC	256	32			
LM4F112H5QD	256	32			
			105	144-pin LQFP	

Stellaris® LM4F120 Series — General MCU + USB Device

Part Number	Flash (KB)	SRAM (KB)	5-V Tolerant GPIOs	Package	Information
LM4F120B2QR	32	12	43	64-pin LQFP	Includes low-power hibernate functionality.
LM4F120C4QR	64	24			
LM4F120E5QR	128	32			
LM4F120H5QR	256	32			
LM4F121B2QR	32	12	49	64-pin LQFP	No low-power hibernate functionality, but includes additional serial functionality, and up to six more I/Os than the LM4F120 Series.
LM4F121C4QR	64	24			
LM4F121E5QR	128	32			
LM4F121H5QR	256	32			
LM4F122C4QC	64	24	69	100-pin LQFP	Includes low-power hibernate functionality, and additional serial and analog functionality in larger pin-count packages.
LM4F122E5QC	128	32			
LM4F122H5QC	256	32			
LM4F122H5QD	256	32			
			105	144-pin LQFP	

Stellaris® LM4F130 Series — General MCU + USB OTG

Part Number	Flash (KB)	SRAM (KB)	5-V Tolerant GPIOs	Package	Information
LM4F130C4QR	64	24	43	64-pin LQFP	Includes low-power hibernate functionality.
LM4F130E5QR	128	32			
LM4F130H5QR	256	32			
LM4F131C4QR	64	24	49	64-pin LQFP	No low-power hibernate functionality, but includes additional serial functionality, and up to six more I/Os than the LM4F130 Series.
LM4F131E5QR	128	32			
LM4F131H5QR	256	32			
LM4F132C4QC	64	24	69	100-pin LQFP	Includes low-power hibernate functionality, and additional serial and analog functionality in larger pin-count packages.
LM4F132E5QC	128	32			
LM4F132H5QC	256	32			
LM4F132H5QD	256	32			
			105	144-pin LQFP	

Stellaris® LM4F230 Series — Motion Control + USB OTG

Part Number	Flash (KB)	SRAM (KB)	5-V Tolerant GPIOs	Package	Information
LM4F230E5QR	128	32	43	64-pin LQFP	Includes low-power hibernate functionality.
LM4F230H5QR	256	32			
LM4F231E5QR	128	32	49	64-pin LQFP	No low-power hibernate functionality, but includes additional serial functionality, and up to six more I/Os than the LM4F230 Series.
LM4F231H5QR	256	32			
LM4F232E5QC	128	32	69	100-pin LQFP	Includes low-power hibernate functionality, and additional motion control, serial, and analog functionality in larger pin-count packages.
LM4F232H5QC	256	32			
LM4F232H5QD	256	32			
			105	144-pin LQFP	

Texas Instruments • 108 Wild Basin, Suite 350 • Austin, TX 78746

<http://www.ti.com/stellaris>

Copyright © 2011 Texas Instruments, Inc. All rights reserved. Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks, and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated